

GRAFLITE

COMBINATIONS & PRICES

Cat. No.	Price
2725 GRAFLITE No. 25 Unit (2-cell with 5" reflector).....	\$25.95†
2727 GRAFLITE No. 27 Unit (2-cell with 7" reflector).....	24.95†
2735 GRAFLITE No. 35 Unit (3-cell with 5" reflector).....	27.45†
2737 GRAFLITE No. 37 Unit (3-cell with 7" reflector).....	26.45†
2736 GRAFLITE No. 35 Synchronizer (3-cell with 5" reflector)	40.65*
2738 GRAFLITE No. 37 Synchronizer (3-cell with 7" reflector)	39.65*

† Does not include cord or mounting plate.

* Does not include mounting plate or installation.

GRAFLITE Mounting Plates and Brackets

Cat. No.	Price
2754 Flat mounting plate.....	1.10
2753 Rangefinder encircling bracket for Pacemaker "34's" and "45's" with rangefinders.....	2.65
2755 Mounting plate for Pacemakers without rangefinder	2.10
2758 L-Bracket for Pacemaker "23's" with rangefinder.....	2.80

Other GRAFLITE ACCESSORIES and REPLACEABLE PARTS

Cat. No.	Price
2712 GRAFLITE Side Lighting Unit, including No. 2706 15' ex- tension cord, less reflector.....	\$16.00
2747 7" GRAFLITE reflector for medium base lamps.....	6.50
2749 5" GRAFLITE adjustable reflector for bayonet base lamps	7.50
2746 Shield for GRAFLITE or GRAFLEX 5" reflector.....	4.20
2774 GRAFLITE 1-cell extension tube (may be used in multiple)	1.50
2701 20" GRAFLITE synchronized shutter cord.....	1.40
2702 36" GRAFLITE synchronized shutter cord.....	1.60
2703 17" GRAFLITE solenoid cord.....	1.20
2704 36" GRAFLITE solenoid cord.....	1.60
2705 16" GRAFLITE twin case connector cord.....	1.05
2706 15" GRAFLITE extension cord.....	1.50
2720 15' GRAFLITE remote control cord with momentary switch	2.90

Prices subject to change without notice.

GRAFLEX, Inc., Rochester 8, N. Y.



GRAFLITE

BY
GRAFLEX



Featuring


★ VERSATILITY
★ DEPENDABILITY
★ SIMPLICITY



CONNECTING CORDS




SHUTTER CORDS
Synchronized shutter to
SHUTTER Outlet
Cat. No. Length
2701 20"
2702 36"



SOLENOID CORDS
Solenoid to **SOLENOID**
Outlet
Cat. No. Length
2703 20"
2704 36"




CONNECTOR CORDS
Battery case to battery case
Cat. No. Length
2705 16"



REMOTE CONTROL CORDS
Remote control with momentary switch
Cat. No. Length
2720 15'

ACCESSORIES



GRAFLITE Side
Lighting Unit
Including 15' extension
cord
Cat. No.
less reflector 2712



7" REFLECTOR
for medium base lamps
Cat. No. 2747



5" REFLECTOR
for bayonet base lamps
Cat. No. 2749



SHIELD FOR
5" REFLECTORS
Will fit all GRAFLEX
5" Reflectors
Cat. No. 2746



EXTENSION
TUBES
may be used in multiple
Cat. No. 2774

GRAFLIT

Eas

the unit desired by amateur or professional makes it the unit required by professionals. Light weight will appeal to all. A powerhouse for synchronizing.




The combined power of the twin battery cases should make it unnecessary to fire dependably the extra flash lamps required.

Here is flash equipment to meet the most exacting requirements.


The multi-purpose circuit controller affords the selection of three circuits, giving you a possibility of numerous connections and uses to meet every requirement.

No sliding, twisting or turning is necessary with the heavy-duty supporting clamps. Just "snap on" for a vise-like grip —to remove, press one button!

Either 5" bayonet or 7" medium base reflector may be easily attached to battery case (while case is on camera) with main switch at either front or rear of the battery case.



REFLECTING OVER 58 YEARS' EXPERIENCE

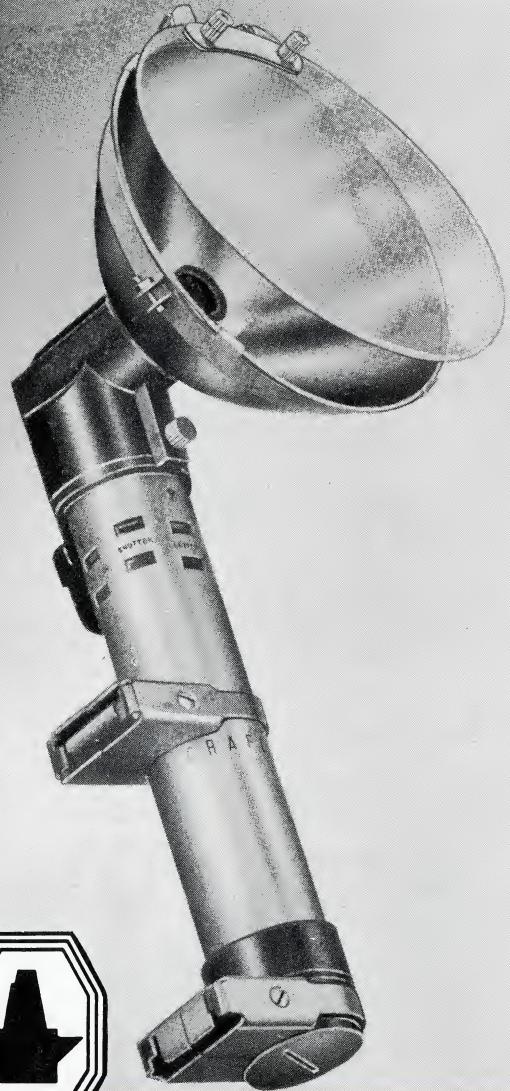




E by Grafex

use of operation of the latest in flash equipment makes it amateur photographers. Undreamed of versatility materials. Its dependability, sleek new styling and surprising synchronized shutters as well as solenoid-operated shutters.own at right may be used to provide the increased power required for synchronized color photography.acting requirements—precision built by Grafex.

Around the top of battery case are 5 outlets, each clearly marked for its intended use. These multiple outlets give an indication of the unusual versatility of Graflite.





Standard household plug connections—positive, sturdy, easy to insert and remove—are one of the multitude of features that mean the finest in flash.

The new micro-type, click action switch makes positive contact easily, with no camera movement, and gives an audible signal of contact.



The heavy-duty supporting clamps (standard equipment) are movable, allowing the battery case to be placed either on the right side or attached to handle lugs on left side, with switch at front or back.

Handy extension tubes, each accommodating one dry cell, may be joined together in multiple for whatever power may be required.

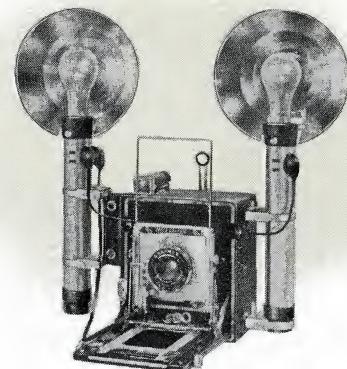

The push button lamp ejector of both 5" and 7" reflectors conveniently pops out the fired bulb, speeding up the loading—flashing—ejecting cycle.